
Rubinetto portagomma a sfera
Ball hose bibcock

Voci di capitolato - *Technical features*

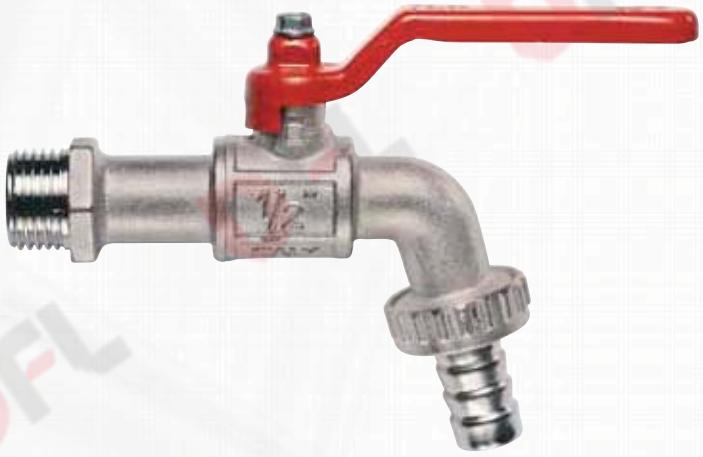


Modello pesante.
Corpo in ottone nichelato.
Raccordo in ottone.
Maniglia a leva in acciaio.
Temperature minima e massima d'esercizio:
-20°C, 80°C.
Attacco filettato ISO228
(equivalente a DIN EN ISO 228 e BS EN ISO 228).
Misure disponibili:
3/8"x3/4", 1/2"x3/4", 3/4"x1", 1"x1"1/4.

Heavy model.
Body in nickel-plated brass.
Hose connection in brass.
Lever handle in steel.
Minimum and maximum working temperatures:
-20°C, 80°C.
Threads ISO228
(equivalent to DIN EN ISO 228 and BS EN ISO 228).
Available sizes:
3/8"x3/4", 1/2"x3/4", 3/4"x1", 1"x1"1/4.


MISURA/SIZE	3/8" (DN 10)	1/2" (DN 15)	3/4" (DN 20)	1" (DN 25)
PRESSIONE/PRESSURE	15bar/217.5psi	15bar/217.5psi	15bar/217.5psi	12bar/174psi
CODICE/CODE	1320038	1320012	1320034	1320100
IMBALLO/PACKING	10/120	10/120	6/72	6/42

Quote di ingombro - *Drawing*

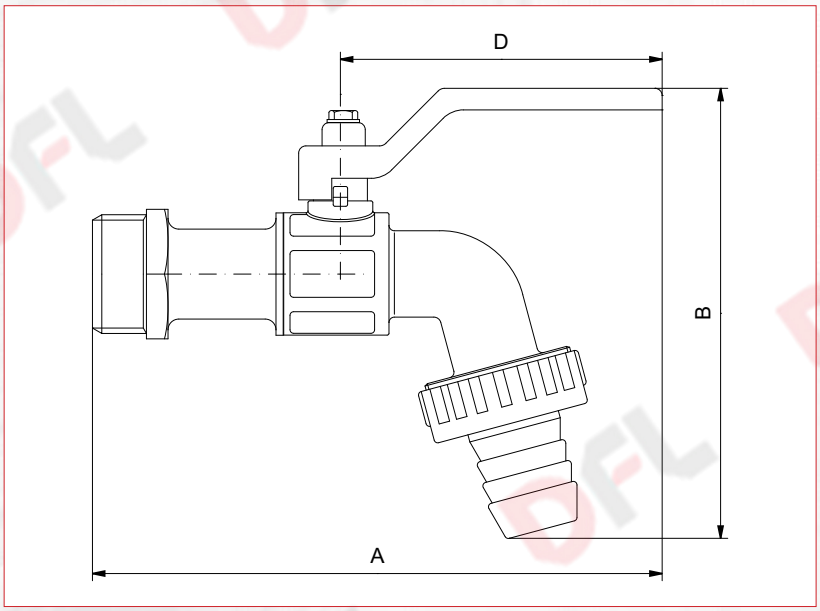

MISURE / SIZE	3/8"	1/2"	3/4"	1"
DN	10	15	20	25
A (mm)	134	137	148,5	158
B (mm)	93	93	108	126
D (mm)	80	80	88,5	88,5
PRESS. ATMOSF./ WORK. PRESS. Kg/cm² - bar	15	15	15	12
PRESS. ATMOSF. PSI LBS WORK. PRESS	220	220	220	170

Scheda materiali - *Materials*

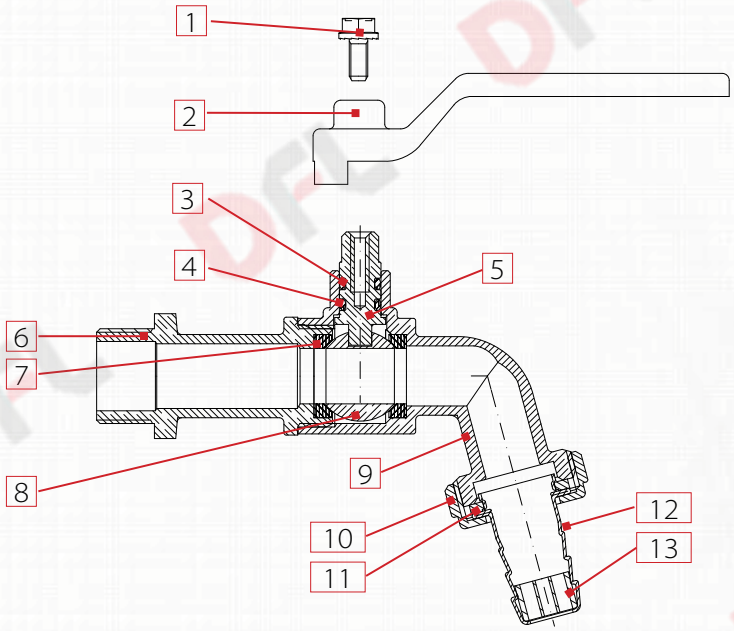

POS.	DESCRIZIONE/DESCRIPTION	Q.TÀ/N.	MATERIALE/MATERIAL
1	Vite / *Screw*	1	Fe CB4 Zincato / *Zincplated steel*
2	Maniglia a leva / *Lever handle*	1	Fe P04 Zincato-Verniciato / *Zincplated and varniched steel*
3	Guarnizione / *O-ring*	1	Or-VITON / VITON - 70 SH/A
4	Guarnizione / *O-ring*	1	OR-NBR / *NBR* - 70 SH/A
5	Asta di manovra / *Stem*	1	Ottone CW614-N / *Brass CW614-N*
6	Manicotto / *End adapter*	1	Ottone stampato CW617-N nichelato / *Hot pressed brass nickel-plated*
7	Tenuta laterale / *Seal*	2	PTFE
8	Sfera / *Ball*	1	Ottone CW614-N nichel-cromo / *Hard crome-plated brass*
9	Corpo / *Body*	1	Ottone stampato CW617-N nichelato / *Hot pressed brass nickel-plated*
10	Girello / *Nut*	1	Ottone stampato CW617-N nichelato / *Hot pressed brass nickel-plated*
11	Guarnizione / *Washer*	1	PVC / *PVC Rubber*
12	Codolo / *Hose connection*	1	Ottone nichelato UNI 4892 - EN 10204 / *Nickel-plated brass*
13	Codolo / *Hose connection*	1	Vestolen / *Vestolen A 6016*

Certificazioni- *Certifications*